

PRODUCT SPECIFICATIONS



Project Name \_\_\_\_\_ Date \_\_\_\_\_

Type or Model \_\_\_\_\_ Qty \_\_\_\_\_

Model # \_\_\_\_\_ Prepared By \_\_\_\_\_


# VOLT® Low Voltage Landscape Lighting Soft-Wash Pro™ LED Hardscape Lights

## Product Description

The VOLT Soft-Wash Pro™ LED Hardscape Light Series consists of four; very low profile strip lights, available in various lengths and colors. Their durable and flexible designs enable mounting under capstones, railings, benches, and other hardscape applications. They can also be used for rooftop and landscape mounting as well. These lights deliver exceptionally wide, diffused illumination without hot spots. They provide a diverse range of lighting solutions and are essential additions to the lighting designer's toolset.



## Product Dimensions

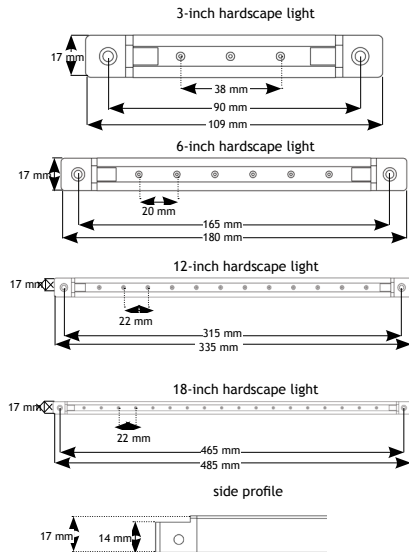

## Features & Benefits

- ▶ Powder coated aluminum extrusion, available in two finishes:
  - Antique Bronze
  - Titanium White
- ▶ LED's encapsulated in resin; provides superior protection against moisture, thermal shock, vibration, extreme temperatures and other potentially damaging environments.
- ▶ 25' of 18AWG SPT-1W wire comes standard
- ▶ Multiple installation options:
  - Surface mounted, using the two pre-drilled holes
  - Incorporated into masonry or concrete, using the 304 stainless steel mounting plate accessory

## Warranty

5 Year Warranty

## Certifications



LISTED File #E466348



LISTED File #E466348

## Specifications

- ▶ **Housing:** Extruded aluminum
- ▶ **Finish:** Antique bronze or titanium white
- ▶ **Lead Wire:** 25' UL approved 18AWG, SPT-1 wire
- ▶ **Light Source:** Integrated LED
- ▶ **Lens:** Encapsulated in resin
- ▶ **Beam Spread:** 120°
- ▶ **Color Temperature (CCT):** 2700K
- ▶ **Color Rendering Index (CRI):** 80+
- ▶ **Life:** 60,000 hr L70
- ▶ **Operating Voltage Range:** 10-15V
- ▶ **Dimming:** non-dimmable
- ▶ **Powered by:** VOLT® low voltage transformers

## Performance Data

Item Number	Watts (W)	Lumens (lm)	Power Factor (PF)	Volt Amps (VA)
VHS-6703	0.25	15	0.64	0.41
VHS-6706	0.50	25	0.64	0.79
VHS-6712	1.00	50	0.64	1.75
VHS-6718	1.30	96	0.64	2.09